


## **SAMPLE DETAIL ONLY (FOR LIFE FLOOR)**

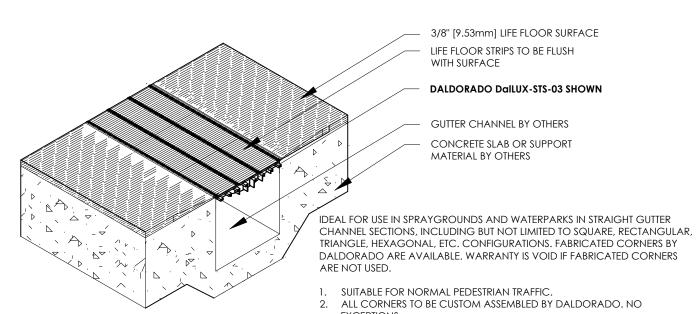

COMPRESSIVE LOAD (kN)	CROSSBEAD DISPLACEMENT (mm)	SPECIMEN DISPLACEMENT (mm)
15.7	3.2	2.7

All drawing are saved in a \*.dwg format and are provided as a service to our customers; dimensions supplied by Daldorado are for reference only. Daldorado or any authorized distributor of our products will not be held responsible from files which have been converted and does not warranty the documents against deficiencies or typographical errors of any kind. All measurements of the actual product must be verified before any custom fabrication in the field occurs. COPYRIGHT: This document is the property of Daldorado, LLC and is provided on an in-confidence basis, it may not be copied or reproduced without the permission of Daldorado or its authorized agent.

REFER TO DALDORADO SUBMITTALS FOR DETAILED PRODUCT INFORMATION.

ADHESIVE: REFER TO LIFE FLOOR INSTRUCTIONS FOR ADHESIVE MATERIAL.

OPEN AREA: STS-04 = 13.0%, 176 GPM; STS-03 = 10.5%, 141 GPM USE IN CONJUNCTION WITH DAILUX-STS-03-BK (4 SLOT, SHOWN ABOVE IN ISOMETRIC) AND DAILUX-STS-04-BK (5 SLOT, SHOWN ABOVE IN SAMPLE

OF THE STONE OR TILE (+/-5,000LBS/2,268KG).

AND TOE ENTRAPMENT GUIDELINES.

GRATE SUPPORT FEATURES HIGH LOAD CAPACITY TO MINIMIZE DEFLECTION

GRATE OPENINGS OF 0.31-IN (8MM) COMPLIES WITH IBC CHILD FINGER

Product: DalLUX Life Floor Tech Detail

Product #: DalLUX-STS-03/04-BK

Material: PVC Rev Date: 07/20/2022

Color: BLACK Rev By: Daldorado

DETAIL) SUBMITTALS.

## HONS FOR ADHESIVE WINTERIAL.

4327 Arnold Ave, Naples, FL 34104 Phone: 888.509.8128 www.daldorado.com

**DALDORADO**